

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
14 April 2005 (14.04.2005)

PCT

(10) International Publication Number
WO 2005/033510 A1

(51) International Patent Classification⁷: **F04B 39/10**,
27/08

(74) Agents: MIYOSHI, Hidekazu et al.; Toranomon Kotohira
Tower, 2-8, Toranomon 1-chome, Minato-ku, Tokyo 105-
0001 (JP).

(21) International Application Number:
PCT/JP2004/014019

(22) International Filing Date:
17 September 2004 (17.09.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-341874 30 September 2003 (30.09.2003) JP

(71) Applicant (for all designated States except US): Calsonic
Kansei Corporation [JP/JP]; 24-15, Minamidai 5-chome,
Nakano-ku, Tokyo, 1648602 (JP).

(72) Inventors; and


(75) Inventors/Applicants (for US only): UEHARA, Katsumi
[JP/JP]. HIGASHIHARA, Shinichiro [JP/JP]. OGURA,
Toshiyuki [JP/JP].

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: COMPRESSOR AND SUCTION VALVE STRUCTURE

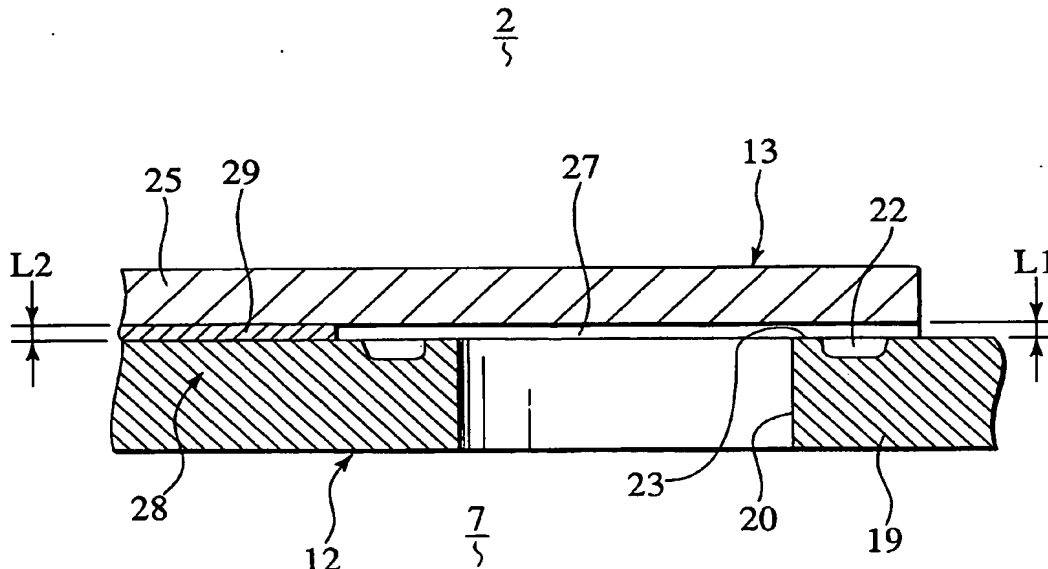

(57) Abstract: In a valve structure according to the present invention, a suction valve is formed with a suction valve main body, and an opposing part that is integrally formed on a suction valve main body, and faces a suction hole and a valve seat at the opening edge of the suction hole so as to be able to open and close the suction hole, and clearance forming means, which forms a predetermined clearance between the opposing part and the valve seat by isolating the opposing part from the valve seat by a predetermined distance, is formed on at least one of the valve plate and the suction valve.



Published:

- with international search report
- with amended claims

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.